



# ADVANCE WASHROOM HYGIENE & SMART SANITATION





#### **ABOUT COMPANY**

At Hyginest, we specialize in washroom Hygiene & smart sanitation, entrance Hygiene and Air management, floor cleaning & waste management and disposable Hygiene essential delivering innovative hygiene solutions that enhance cleanliness and convenience. With ready stock and fast delivery of across India, we ensure our customers get the best products without delays.

Our focus is on quality, efficiency, and sustainability, offering advanced products and modern hygiene systems for businesses that prioritize health and compliance.

RR

We're not just selling products—we're transforming hygiene standards with cutting-edge technology and unmatched service.

95

#### WHAT WE OFFER

Washroom Hygiene	
Hand Dryer	WC Sensor
Soap Dispenser	Urinal Sensor
Paper Dispenser	Air Fresheners
Sensor Tap	Scent Diffuser

Entrance Hygiene	
Air Curtains	Shoe Cover Dispenser
PVC Strip Curtains	Sanitizer Dispenser
Entrance Matting	Q Manager
Insect Killer	Shoe Shining Machine

Cleanroom Hygiene	
Hygiene Station	Hairnet
Wash Station	Gloves
Sole Cleaning Machine Non-Woven Apron	
Face Mask	Shoe Cover

Floor Cleaning & Waste Management	
Scrubber Driers	Housekeeping Tools
Sweeper Machines	Cart & Trolleys
Vacuum Cleaners Caution Signage	
Jet Pressure Washer	Dust Bins


















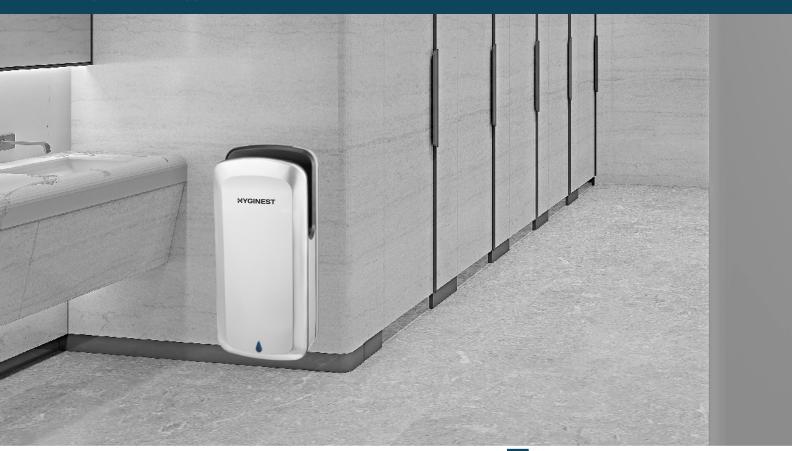

# SS Jet Hand Dryer


## **Model: HDR101BL**

## **Brushless Motor**




Feature	Specification
Motor Type	Brushless Motor, 35,000 RPM, 1350 W
Voltage	220 V- 240 V 50/60 Hz, 7.6A, 1750W
Air Temperature	40°C 104°F (Room Temp.=25°C [77 °F])
Air Velocity	160 M/S [525 FT/S] / 576 KM/H [358 MPH]
Air Flow	127 M³/H [74 CFM]
Drying Time	7 Seconds
Material	Stainless Steel 304 cover + ABS Plastic bracket & ends
Protection Level	IP 24
Electrical Isolation	CLASSI
Noise Level [at 1 M]	70 dB
Unit Shipping Weight	11kg
Unit Net Weight	9.3kg
Filter Type	НЕРА
Replaceable Tank	450ml









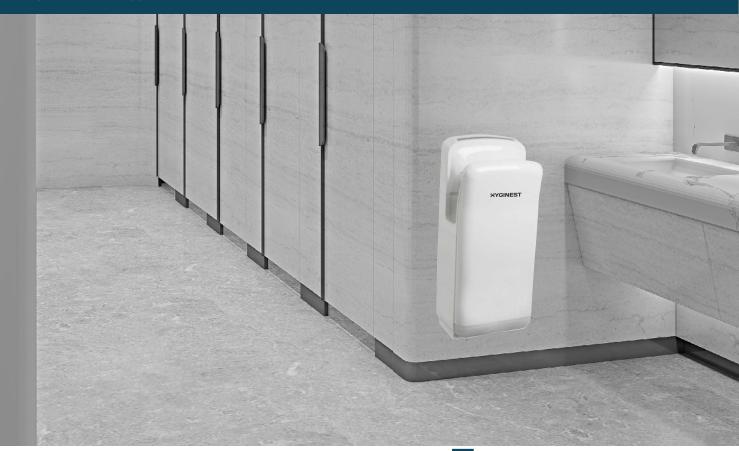


# ABS Jet Hand Dryer

Model: HDR102BL **Brushless Motor** 



Feature	Specification
Motor Type	Brushless Motor, 28,000 RPM, 680 W
Voltage	220 V- 240 V 50/60 Hz, 11.6 A, 2400 W
Air Velocity	97 M/S
Air Flow	180 M³/H
Drying Time	Less Than 20 Seconds
Material	ABS Plastic
Protection Level	IPX1
Noise Level [at 1 M]	60 dB
Unit Net Weight	10kg
Filter Type	НЕРА











# Hand Dryer


## **Model: HDR71BL**

## **Brushless Motor**




Feature	Specification
Motor Type	Brushless Motor, 42,000 RPM, 550 W
Voltage	220 V- 240 V 50/60 Hz, 7.8 A, 1800 W
Air Temperature	40°C 113°F (Room Temp.=25°C [77 °F])
Air Velocity	100 M/S [328 FT/S] / 340 KM/H [224 MPH]
Air Flow	122 M³/H [ 75.7 CFM ]
Drying Time	8 to 10 Seconds
Cover Material	Stainless Steel 304
Sensor Range	5-15 CM
Protection Level	IP 23
Electrical Isolation	CLASS I
Noise Level [at 1 M]	74 dB
Speed & Sound Stepless Control	64 - 100 M/Second & 65-74 dB
Heat Element ON/OFF	Smart off or Switchable
Unit Net Weight	9.3kg
Filter Type	НЕРА







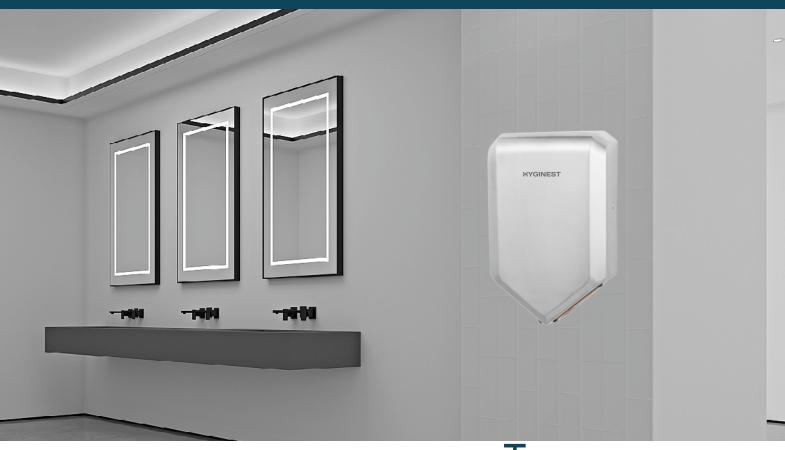


# Hand Dryer

## **Model: HDR72**




Feature	Specification
Motor Type	Brush Contacts Motor, 35,000 RPM, 580 W
Voltage	220 v - 240 V 50/60 Hz, 4A, 1000 W
Air Temperature	40°C 104°F (Room Temp.=25°C [77 °F])
Air Velocity	105 M/S [344 FT/S] / 378 KM/H [235 MPH]
Air Flow	87 M³/H [51.1 CFM]
Drying Time	10 to 12 Seconds
Cover Material	Stainless Steel 304
Sensor Range	5-15 CM
Protection Level	IP 23
Electrical Isolation	CLASSI
Noise Level [at 1 M]	74 dB
Speed & Sound Stepless Control	61 - 100 M/Second & 61-74 dB
Heat Element ON/OFF	Smart off or Switchable
Unit Net Weight	3.5kg
Filter Type	НЕРА





# TurboDry Pro



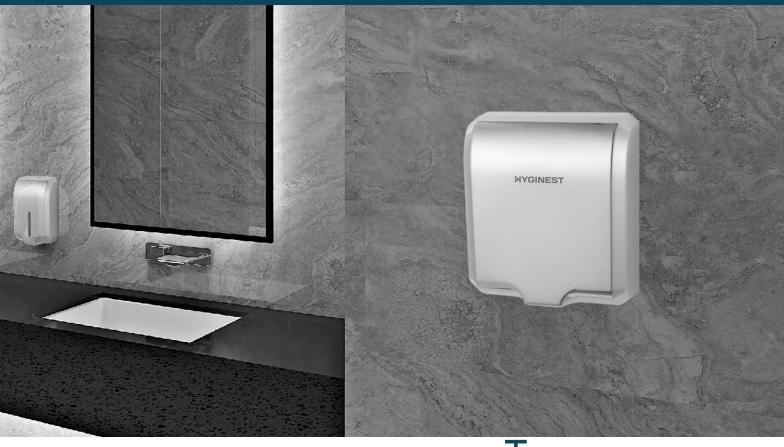


# Hand Dryer

## **Model: HDR73**




Feature	Specification
Motor Type	Brush Contacts Motor, 35,000 RPM, 580 W
Voltage	220 V- 240 V 50/60 Hz, 4 A, 1000 W
Air Temperature	40°C 104°F (Room Temp.=25°C [77 °F])
Air Velocity	105 M/S [344 FT/S] / 378 KM/H [235 MPH]
Air Flow	87 M³/H [51.1 CFM]
Drying Time	10 to 12 Seconds
Cover Material	Stainless Steel 304
Sensor Range	5-15 CM
Protection Level	IP 23
Electrical Isolation	CLASS I
Noise Level [at 1 M]	74 dB
Speed & Sound Stepless Control	61 - 100 M/Second & 61-74 dB
Heat Element ON/OFF	Smart off or Switchable
Unit Net Weight	3.5kg
Filter Type	НЕРА









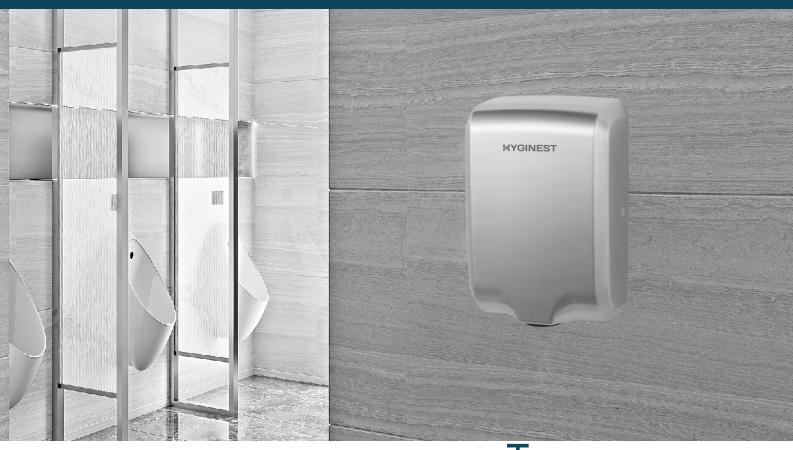


# Hand Dryer

## **Model: HDR74**




Feature	Specification
Motor Type	Brush Contacts Motor, 28,000RPM, 300W
Voltage	220 V - 240 V 50/60 Hz, 3.0 A, 700 W
Air Temperature	38°C 99°F (Room Temp.=25°C [77 °F])
Air Velocity	93 M/S [295 FT/S] / 324 KM/H [201 MPH]
Air Flow	77 M³/H [26.4 CFM]
Drying Time	15 Seconds
Cover Material	Stainless Steel 304
Sensor Range	5-15 CM
Protection Level	IP 23
Electrical Isolation	CLASS I
Noise Level [at 1 M]	70 dB
Heat Element ON/OFF	Switchable
Unit Net Weight	2.5kg









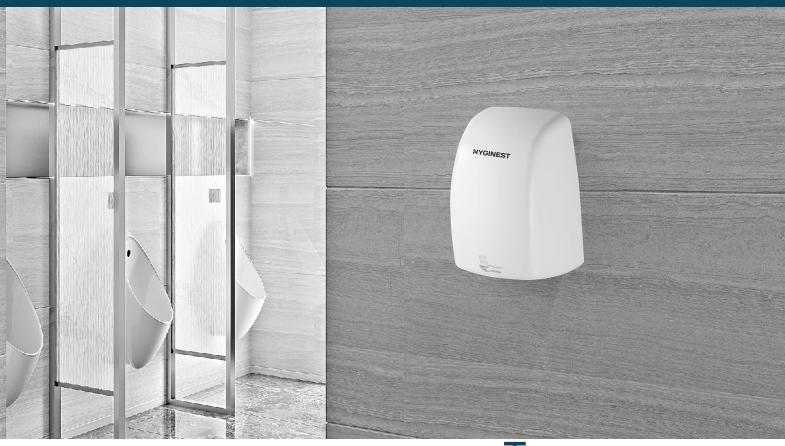

# **ABS Hand Dryer**

## **Model: HDR75**



Specification
Brush Contacts Motor, 28,000RPM, 350W
220 V - 240 V 50/60 Hz, 3.0 A, 1000 W
53 M/S [174 FT/S] / 190 KM/H [118 MPH]
140 M³/H
Less than 30 Seconds
ABS Plastic
20 CM
IPX1
80 dB
2.5kg






# SOAP DISPENSER








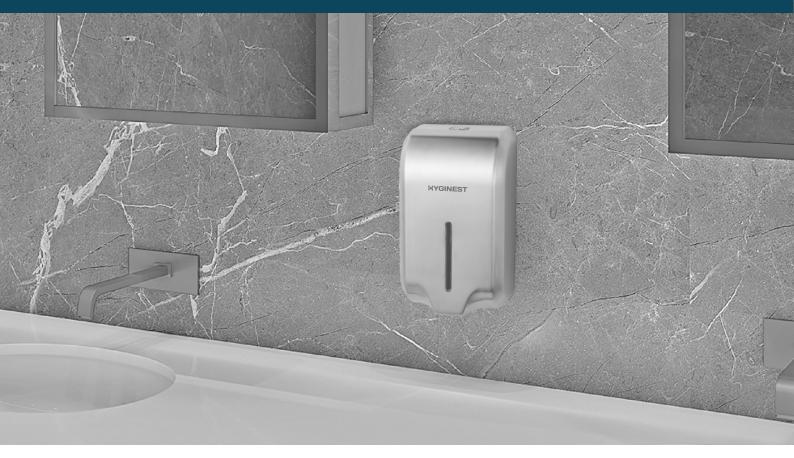

# Touchless Soap Dispenser

Feature	Specification
Motor Type	DC Motor, 1400 RPM, 0.5 W
Voltage (-1)	DC 6V [4Pcs AA / LR6 Alkaline Battery]
Capacity	1200 ML
Dose/Pump [Gel]	1.0 ML
Sensor Range	3 -10 CM
Battery Life	50,000 Cycles
Drop Type	Gel Soap
Density	0.9 - 1.35 Kg/Dm³
Viscosity	550 - 2,500 Cps
Body Material	Stainless Steel
Do Not Use	Soap contains chlorine or solid or abrasive particles













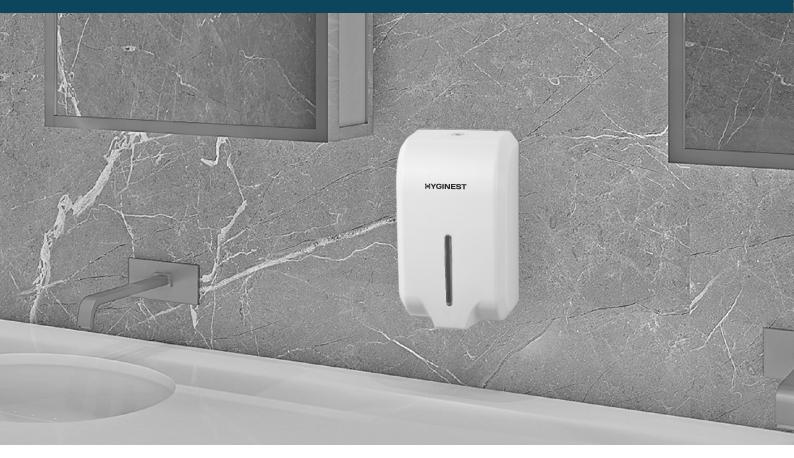

# Touchless Soap Dispenser

Feature	Specification
Motor Type	DC Motor, 1400 RPM, 0.5 W
Voltage (-1)	DC 6V [4Pcs AA / LR6 Alkaline Battery]
Capacity	1200 ML
Dose/Pump [Gel]	1.0 ML
Sensor Range	3 -10 CM
Battery Life	50,000 Cycles
Drop Type	Gel Soap
Density	0.9 - 1.35 Kg/Dm³
Viscosity	550 - 2,500 Cps
Body Material	ABS Plastic
Do Not Use	Soap contains chlorine or solid or abrasive particles













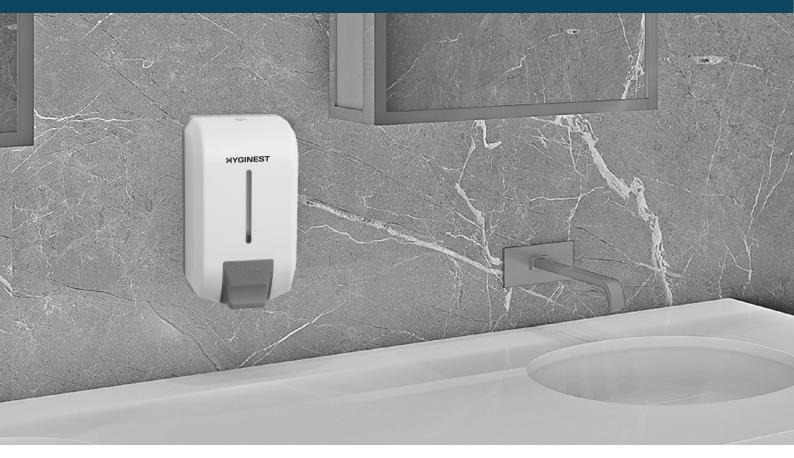


# Manual Soap Dispenser

Feature	Specification
Operation Type	Manual Piston
Capacity	1200 ML
Dose/Pump [Gel]	1.0 ML
Drop Type	Gel Soap
Density	0.9 - 1.35 Kg/Dm³
Viscosity	550 - 2,500 Cps
Body Material	ABS Plastic
Do Not Use	Soap contains chlorine or solid or abrasive particles













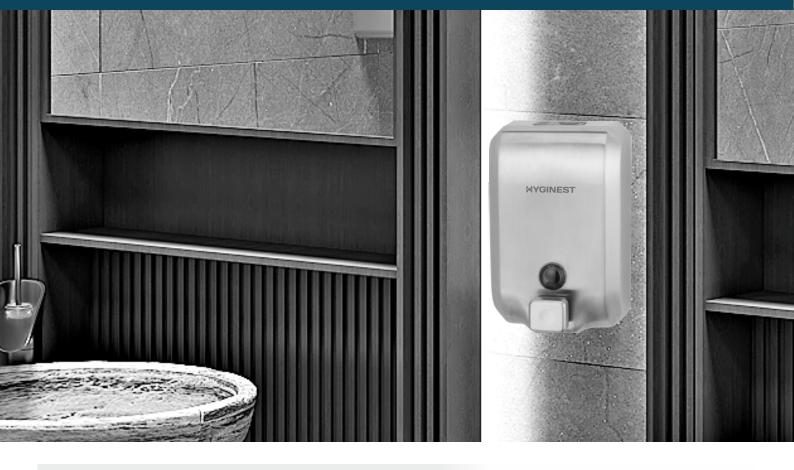

# Manual Soap Dispenser

Feature	Specification
Operation Type	Manual Piston
Capacity	1200 ML
Dose/Pump [Gel]	1.0 ML
Drop Type	Gel Soap
Density	0.9 - 1.35 Kg/Dm³
Viscosity	550 - 2,500 Cps
Body Material	Stainless Steel
Do Not Use	Soap contains chlorine or solid or abrasive particles







# PAPER DISPENSER








LONG LASTING LIFE






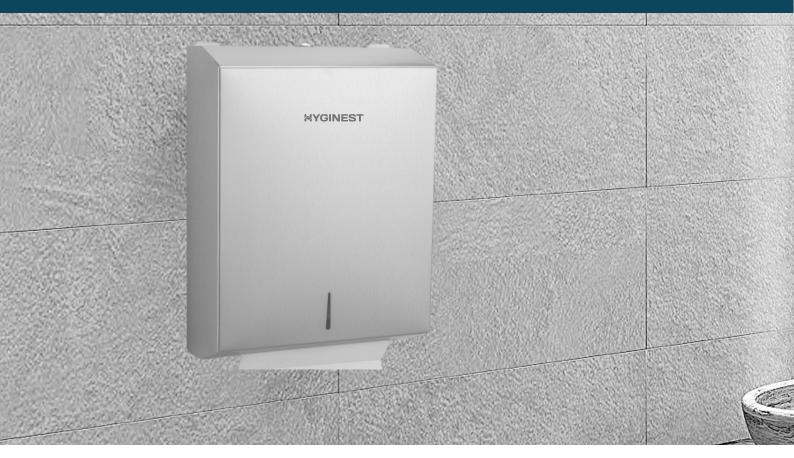

# Paper Towel Dispenser

Feature	Specification
Towel Paper Width	Max. 264 MM
Towel Paper Depth	Max. 80 MM
Towel Paper Capacity C Folded	500 Units
Towel Paper Capacity Z Folded	350 Units
Dispenser Material	Stainless Steel
Unit Net Weight	1.85 KG
Anti-Theft Lock	Included
Content Level View Slot	Included














# Paper Towel Dispenser

Feature	Specification
Towel Paper Width	Max. 264 MM
Towel Paper Depth	Max. 80 MM
Towel Paper Capacity C Folded	400 Units
Towel Paper Capacity Z Folded	250 Units
Dispenser Material	Stainless Steel
Unit Net Weight	1.45 KG
Anti-Theft Lock	Included
Content Level View Slot	Included












# Automatic Universal Roll Towel Dispenser


Feature	Specification
Motor Type Dispensing Towel	DC Motor, 2,500 RPM, 4.8 W
Motor Type Cutting Towel	DC Motor, 1225 RPM, 3.6 W
Voltage (-1)	DC 6V [4Pcs D/LR20 Alkaline Battery]
Voltage (-2)	Optional Plug in AC Adapter on Input 110V - 240V / Output 6V, 2A
Roll Towel Capacity	Max. Diameter 190MM
Roll Towel Width	Max. 200 MM
Roll Towel Length	Up to 200M
Roll Towel Spindle	Diameter 40MM
Single-Sheet Dispensing Length	210MM / 260MM / 310MM
Dispenser Material	High Impact ABS Plastic
Unit Net Weight	3.00 KG
Anti-Theft Lock	Included
Content Level View Slot	Included










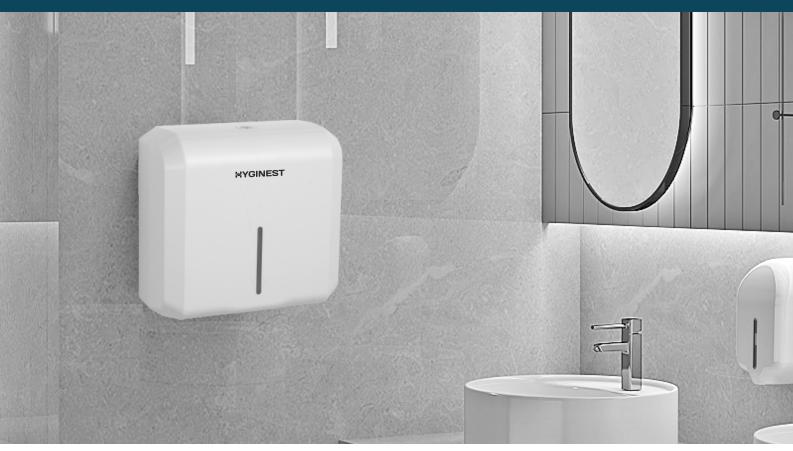

# Paper Towel Dispenser

Feature	Specification
Towel Paper Width	Max. 230 MM
Towel Paper Depth	Max. 75 MM
Towel Paper Capacity C Folded	400 Units
Towel Paper Capacity Z Folded	250 Units
Dispenser Material	High Impact ABS Plastic
Unit Net Weight	0.65 KG
Anti-Theft Lock	Included
Content Level View Slot	Included












# Toilet Roll Dispenser

## **Model: HTPR01**

Feature	Specification
Toilet Roll Capacity	Max. Dia. 230 MM
Toilet Roll Width	Max. 115 MM
Toilet Roll Length	300 MM
Dispenser Material	Stainless Steel
Unit Net Weight	1.20 KG
Anti-Theft Lock	Included
Content Level View Slot	Included







# WASHROOM PANEL






# Washroom Panel (3 in 1)

## **Model: HWP01**

Feature	Specification
Hand Dryer Motor Type	Brushless Motor, 43,000 RPM, 600 W
Voltage	220 V- 240 V 50/60 Hz, 7.8 A, W
Air Velocity	100 M/S [328 FT/S / 340 KM/H [224 MPH]
Air Flow	122 M³/H [ 75.7 CFM ]
Drying Time	8 to 10 Seconds
Paper Towel Width	Max. 305 MM
Towel Capacity [C Fold]	500 Unit
Waste Bin Capacity	23 Ltr
Dimensions	W370× D160 ×H1650MM
Cabinet Material	SS 304
Cabinet Thickness	0.8 MM
Anti-Theft Lock	One key for all lock




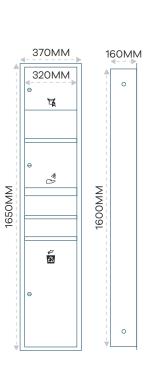


# Washroom Panel (3 in 1)

Feature	Specification
Paper Towel Width	Max. 305 MM
Towel Capacity [C Fold]	500 Unit
Waste Bin Capacity	23 Ltr
Dimensions	W370× D160 ×H1300MM
Cabinet Material	SS 304
Cabinet Thickness	0.8 MM
Anti-Theft Lock	One key for all lock







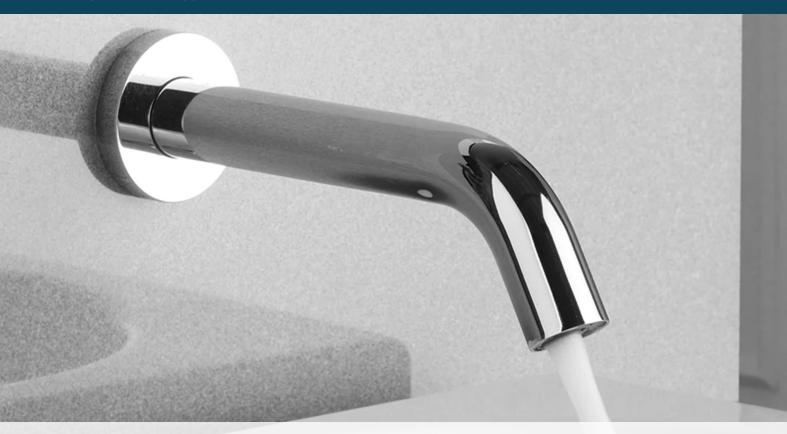



HYGIENIC ENVIRONMENT



SAVES WATER



MUST FOR
GREEN BUILDING





## Basin Mounted Sensor Faucet




#### **Model: HT01B**

Material Chrome Plated Brass Metal Body DC | AC | AC/DC (6V DC/ 220V AC) Power 30-200mm

Sensing Distance Safety Shut Off 1 Minute

Working Water Pressure 0.02Mpa-0.8Mpa Inlet/ Outlet G1/2" (Dn15)

Stylish & sleek design with linear sensor, Specially crafted for small to medium size basin.



## Basin Mounted Sensor Faucet


## **Model: HT02B**



Chrome Plated Brass Metal Body Material Power DC | AC | AC/DC (6V DC/ 220V AC)

Sensing Distance 30-200mm Safety Shut Off 1 Minute Working Water Pressure 0.02Mpa-0.8Mpa Inlet/ Outlet G1/2" (Dn15)

Aesthetically Modern Luxury Designed Linear Sensor Faucet.



## Basin Mounted Mixer Sensor Faucet



#### **Model: HT03B**

Material Chrome Plated Brass Metal Body DC | AC | AC/DC (6V DC/ 220V AC) Power

30-200mm Sensing Distance Safety Shut Off 1 Minute

Working Water Pressure 0.02Mpa-0.8Mpa Inlet/ Outlet G1/2" (Dn15)

Sleek, Hidden Mouth Sensor at Faucet Opening for an Enhanced User Experience.





## Wall Mounted Mouth Sensor Faucet


#### **Model: HT04W**



Material Chrome Plated Brass Metal Body DC | AC | AC/DC (6V DC/ 220V AC)

Sensing Distance 30-150mm Safety Shut Off 1 Minute Working Water Pressure 0.02Mpa-0.8Mpa

G1/2 " (Dn15) Inlet/ Outlet Sleek hidden mouth sensor at faucet opening for Great user





# Long Body Faucet for Table Top Wash Basins

#### Model: HT05L

Material Chrome Plated Brass Metal Body Power DC | AC | AC/DC (6V DC/ 220V AC)

Sensing Distance 30-150mm Safety Shut Off 1 Minute

Working Water Pressure 0.02Mpa-0.8Mpa Inlet/ Outlet G1/2" (Dn15)

Sleek hidden mouth sensor at faucet Opening for great user experience.



# Long Body Faucet for Table Top Wash Basins


#### Model: HT06L

Material Chrome Plated Brass Metal Body Power DC | AC | AC/DC (6V DC/ 220V AC)

30-200mm Sensing Distance Safety Shut Off 1 Minute

0.02Mpa-0.8Mpa Working Water Pressure Inlet/ Outlet G1/2" (Dn15)

Aesthetically Modern Designed Linear Sensor Faucet With 6 inch extension.





# Ceiling Mounted Mouth Sensor Faucet

#### Model: HT07C (Customized Model)

Chrome Plated Brass Metal Body Material Power DC | AC | AC/DC (6V DC/ 220V AC)

Sensing Distance 30-150mm Safety Shut Off 1 Minute


Working Water Pressure 0.02Mpa-0.8Mpa Inlet/ Outlet G1/2" (Dn15)

Eliminate sensor locating & tampering issues and gives smooth operation for great user experience Can be customized as per site (4ft/5ft/6ft)

\*Basin not included

(Also Available in 48",51",54",75",78" & 81" Extra Cost will Apply)

(Available in Black, Golden & RoseGold)





## Floor Mounted - Mouth Sensor Faucet

## Model: HT08F (Customized Model)

Material Chrome Plated Brass Metal Body Power DC | AC | AC/DC (6V DC/ 220V AC)

Sensing Distance 30-150mm Safety Shut Off 1 Minute Working Water Pressure 0.02Mpa-0.8Mpa

Inlet/ Outlet G1/2" (Dn15)

Eliminate sensor locating & tampering issues and gives smooth operation for great user experience Can be customized as per site (4ft/5ft/6ft)




## Non Return Mixer Valve

#### Model: HT09MV

Material Chrome Plated Brass Metal Body Dimensions  $6.5 \times 5.8 \times 5.9 \text{cm} (LxWxH)$ 

Inlet Connection Size 0.5 Inches


An optional attachment for Conversion of any single line sensor tap into double line mixer. Hot & Cold ratio can be adjusted with the help of single lever.



FLOW RATE TABLE	Pressure ( Mpa )	0.02	0.05	0.1	0.2	0.3
	Average Flow rate (L/min)	3	9	14	18	23



# URINAL & WC SENSOR

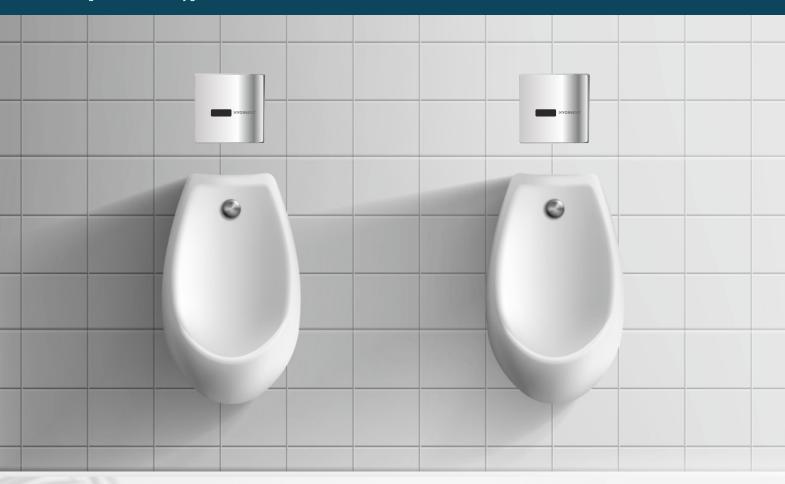



HYGIENIC ENVIRONMENT



SAVES WATER



MUST FOR GREEN BUILDING







## Concealed Urinal Flusher

#### Model: HU01

Sensing Distance 50-650mm

Flush Time 8 Seconds Post-flush Working Water Pressure 0.02Mpa-0.8Mpa Inlet/ Outlet G1/2" (Dn15)

Material: ABS Chrome Finish Front Plate, ABS Concealed Box, PoM Solenoid Valve Straight type with Brass flow control.

Premium model with one of its kind aesthetic Urbane look 'Chrome Finish' sensor plate. \*AC/DC Adaptor on demand



€ 64 MM ▶



# Battery Operated Exposed Urinal Flusher


## Model: HU02 (Polished Chrome Brass)

6V DC - 4X AA Size Alkaline Battery Type

Sensing Distance 50-650mm

8 Seconds Post-flush Flush Time Working Water Pressure 0.02Mpa-0.8Mpa Inlet/ Outlet G1/2" (Dn15)

Polished Chrome Stylish Brass Retrofit model to convert your manual flush valve into automatic without any civil job required.



SIDE VIEW



# ∺YGINEST

## Concealed WC Flusher with Push Button

#### Model: HW01 (BRUSHED S.S)

Sensing Distance 50-650mm

Flush Time 8 Seconds Post-flush Working Water Pressure 0.01Mpa-0.8Mpa

Inlet/ Outlet 40mm Inlet/Outlet orifice Top to Bottom

Deodorize features of 24 hours voluntarily flush if no use

Can operate through sensor or push button, Having highly robust brass valve with inbuilt strainer and flow control. \*AC/DC Adaptor on demand



128 MM

 $\bigcirc$ 



# Integrated Automatic Urinal Sensors With Urinal Pot

## **Model: HUC01**

Battery Type 6V DC - 4X AA Size Alkaline

Sensing Distance 50-650mm

Flush Time 8 Seconds Post-flush Working Water Pressure 0.02Mpa-0.8Mpa Inlet/ Outlet G1/2" (Dn15)

In build Sensor • High Quality Ceramic • Easy Installation





URINAL SENSOR KIT



FLOW BRAIDED PIPE CONTROL



URINAL BRACKET SET FLANGE KIT



# Integrated Automatic Urinal Sensors With Urinal Pot

## **Model: HUC02**

Battery Type 6V DC - 4X AA Size Alkaline

Sensing Distance 50-650mm

Flush Time 8 Seconds Post-flush Working Water Pressure 0.02Mpa-0.8Mpa Inlet/ Outlet G1/2" (Dn15)

In build Sensor • High Quality Ceramic • Easy Installation





URINAL SENSOR KIT




FLOW BRAIDED PIPE CONTROL



URINAL BRACKET SET FLANGE KIT



# WASHROOM ACCESSORIES

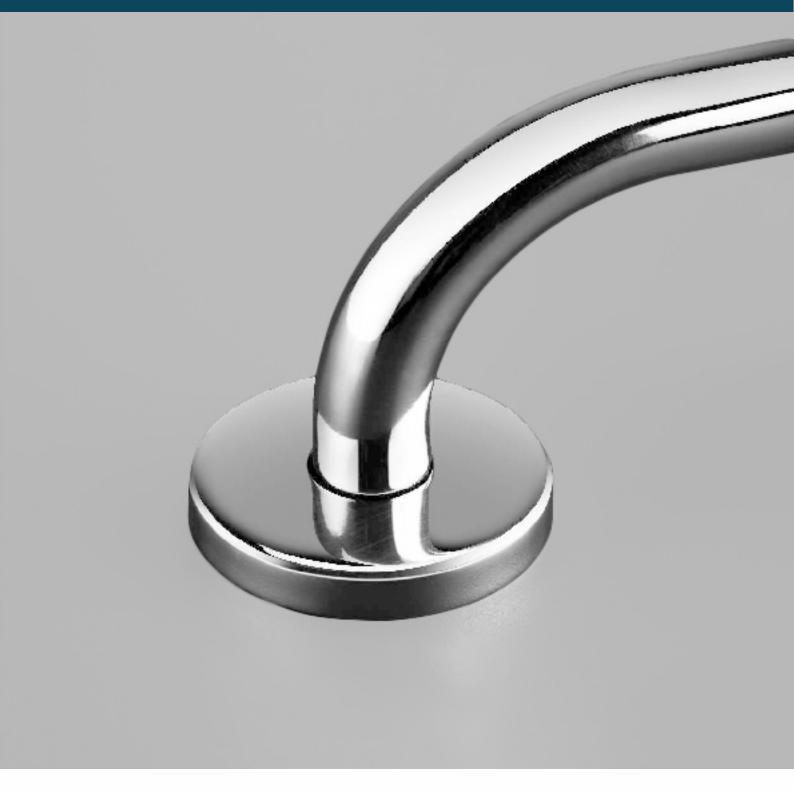



Toilet Paper Holder
Model: HTPR02



Toilet Paper Holder with Flap

Model: HTPR03



# Disable Seat

#### **Model: HTS01**

Made from Stainless steel 304 which is anti corrosion and rust proof having weight capacity of 135 kgs.



## Disable U Grab bar

#### **Model: HGR01**

Made from Stainless steel 304 which is anti corrosion and rust proof



# Grab Bar (Regular)

#### **Model: HGR02**

Bar Radius: 25 mm,

Available Sizes (mm): 200, 250, 300, 375, 600



# Grab Bar (Heavy)

#### **Model: HGR03**

Bar Radius: 32 mm,

Available Sizes (mm): 300, 375, 450, 600, 750, 900



## Grab Bar (L Shape Vertical) **Model: HGR04LV**

Available Sizes (mm): 300x300, 450x450, 600x600,750x750, 900x900, 1200x1200



# Grab Bar (L Shape Horizontal)

Model: HGR04LH

Available Sizes (mm): 300x450, 450x600, 600x750, 750x900, 900x1200, 1200x1500







# Thank You for Exploring Our Product Range

We appreciate your time in browsing through our catalogue and hope you found the ideal solution tailored to your needs. Each product is thoughtfully designed to address specific applications, ensuring you receive the most effective and reliable solution for your space.

At **Hyginest**, we are committed to delivering superior quality and maintaining the highest hygiene standards.

For any inquiries, product details, or purchase assistance, please feel free to contact us. Our dedicated team is always ready to help you find the perfect solution.



## **Contact Us**



East India:

Customer Care+91 800 600 4329service@hyginest.comaccount@hyginest.com

**Regional Contacts** 

North India: north@hyginest.com South India: south@hyginest.com West India: west@hyginest.com

east@hyginest.com

+91 96381 23334

sales@hyginest.com

www.hyginest.com